



NANLITE

Forza 500

- Monolight style COB LED
- Output 11950 Lux of 5600K daylight-balanced light at 1 meter
- Weighs only 5.7 lbs
- Flicker-Free Dimming from 100% to 1% up to 25,000 fps
- High CRI/TLCI of 95/96
- Includes Light, Power Adapter, Reflector & Carry Case

Lightweight, Compact Design

Created to eliminate the difficulties of traveling with large light fixtures the Forza 500 weighs only 5.7 lbs and is compact enough to be easily packed into most gear cases.

Practical Effects

With pre-programmed special effects in a simple-to-master menu system, the Forza makes it easy to imitate lighting scenarios that can otherwise be tricky to recreate. At the touch of a button, you can simulate the lighting effects of lightning, a TV screen, a flash, and a malfunctioning light bulb.

Bowens Style Light Modifier Mount


By utilizing the near-universal Bowens style light modifier mount, the Forza 500 is compatible with a massive selection of light modifiers. Including, but not limited to NanLite's line of softboxes and umbrellas.

Additional Accessories:

FL-20 Fresnel Lens for Forza 300/500	RC-1 Remote Control
Nanlink App Control System	SB-PR-90 Para 90 Softbox with Bowens Mount (35in)
SB-PR-120 Para 120 Softbox with Bowens Mount (47in)	SB-PR-150 Para 150 Softbox with Bowens Mount (59in)



Technical Data	Power Consumption	500W	
	Power Supply	DC48V / 12.5A 100-240V AC	
	Battery Compatibility	Sony V-Mount 26v Battery (Not Included)	
	Charge Time to Full	Battery Dependent	
	Runtime @ 100% Brightness	(2x) 26V Sony V-Mount Style 230WH: 1.5 hours	
	Lumen Output 5600K	46613	
	CRI (Ra)	98	
	TLCI	95	
	Color Temperature	5600K	
	Dimming	0 to 100% continuous	
	Control	Dimming, 2.4G wireless control, Wifi control, DMX	
	Dimensions	12.2 x 8.1 x 5.6 In	
	Weight	Light	5.5 Lbs
		Light + Adapter + Power Box	10.6Lbs
	Cooling System	Active Silent Fan	
	DMX Control	Yes	
Mount	5/8" reciever with rotating yoke/Bowns S Style		
Warranty	Limited 1-Year		

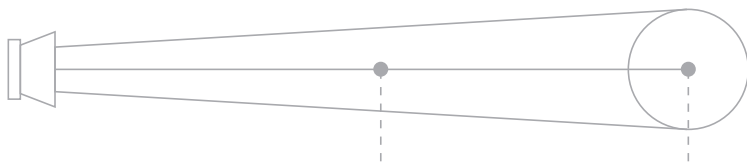

Distance	1M	3M
With Standard Reflector	66300 lux	6257 lux
	6159 fc	582 fc
Without Lens	19820 lux	2217 lux
	1841 fc	205 fc
With Fresnel lens Spot 10°	N/A lux	25090 lux
	N/A fc	2330 fc
With Fresnel lens Flood 45°	48810 lux	13520 lux
	4534 fc	1256 fc